

## TECHNICAL DATA SHEET

MAN CAGE (HOT DIPPED GALVANISED) - 250KG

MODEL: FMC-19-120-HDG



### DESCRIPTION

The 250kg Hot Dipped Galvanised Forklift Man Cage has been designed for forklift use to safely carry out tasks of short duration and occasional usage such as maintenance work or stock-take.


### FEATURES

- ☒ Suitable for a maximum of two persons
- ☒ The cage is supplied with slipper locking pins and two harness anchor points in the floor of the cage
- ☒ It also has a handy tool tray across the back to keep the floor clear
- ☒ Hot dipped galvanised finish.
- ☒ This is delivered flat packed and requires approximately 20 minutes assembly.

# TECHNICAL DATA SHEET

MAN CAGE (HOT DIPPED GALVANISED) - 250KG

MODEL: FMC-19-120-HDG

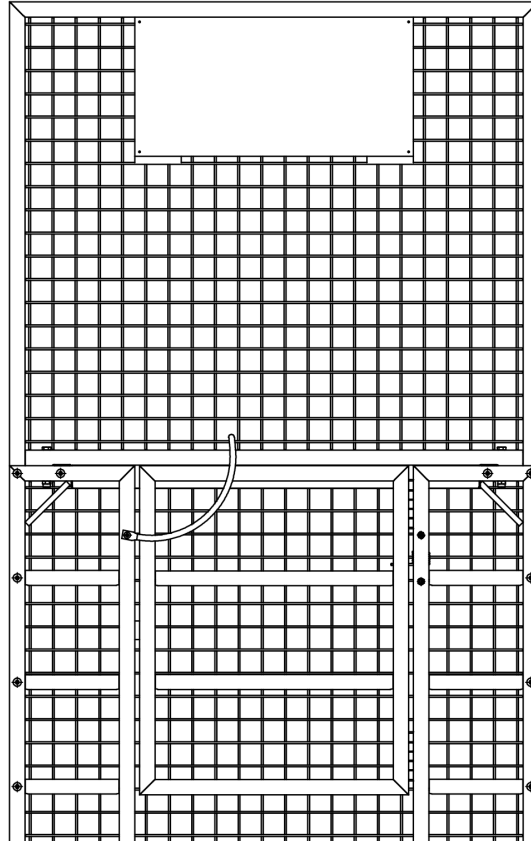

## SPECIFICATIONS

WORKING LOAD LIMIT	LOAD CENTRE	FORK POCKET SIZE	POCKET CENTRES	DIMENSIONS	UNIT WEIGHT
250KG	600mm	160 x 60mm	640mm	1250 x 1150 x 2000mm	110kg
<b>HORIZONTAL CENTRE OF GRAVITY</b>					
550mm					

## CERTIFICATION

Manufactured strictly in accordance with the following standards:

STANDARD	DESCRIPTION
AS 3990	Structural Steel for mechanical engineering
AS 2359.1	Powered Industrial Trucks
AS 1554	Structural Steel Welding
AS 1657	Fixed Platform requirements, Walkways, Stairways